XS-F1020/F1320

4 1/2" & 5 1/4" 2-Way Speakers

Ω 80 W Max Input Power
Ω 4 1/2" Polypropylene Woofer
Ω 1" Balanced Dome Tweeter
Ω High Efficiency (90dB/W/m)
Ω Low Profile 1 3/4" Depth

Ω 120 W Max Input Power
Ω 5 1/4" Polypropylene Woofer
Ω 1 3/16" Balanced Dome Tweeter
Ω High Efficiency (90dB/w/m)
Ω Low Profile 1 3/4" Depth

Specifications

Speaker	Coaxial 2-way
	XS-F1020: Woofer 10 cm (4 in.), Polypropylene cone type Tweeter: 2.5 mm (1 in.) PEI, balanced dome type
	XS-F1320: Woofer 13 cm (5 1/4 in.), Polypropylene cone type Tweeter: 3 mm (1 3/16 in.), PEI, balanced dome type
Maximum input power	XS-F1020: 80 watts XS-F1320: 120 watts
Rated input power	XS-F1020: 25 watts XS-F1320: 30 watts
Impedance	4 ohms
Sensitivity	XS-F1020: 89 dB / W / m XS-F1320: 90 dB / W / m
Frequency response	XS-F1020: 45 - 30,000 Hz XS-F1320: 40 - 30,000 Hz
Crossover frequency	N/A
Mass (per speaker)	XS-F1020: Approx. 480g (1 lb, 1 oz.) XS-F1320: Approx. 630g (1 lb. 6 oz.)

XS-F1020 Dimensions

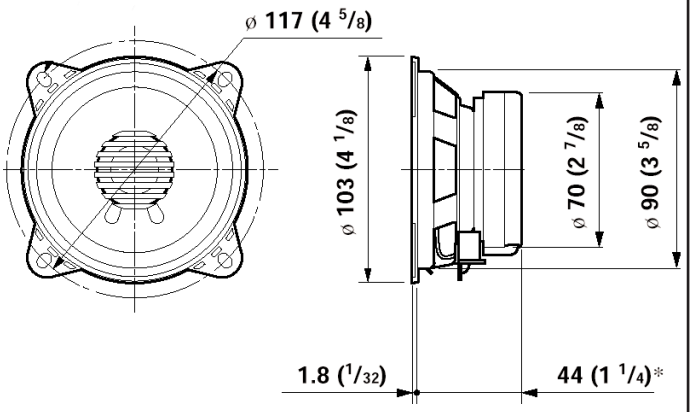

XS-F1320 Dimensions

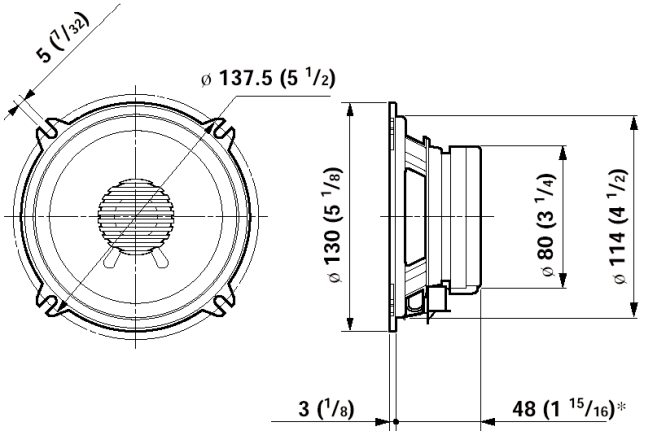

Design and specifications subject to change without notice.